





VEHICLE		E51
Model		CWE 370
Manufacturers Code		CWE64R11MJ
Model Description		6×4 Freight Carrier
MASS		
Tare – total (T) *	kg	8 298
Tare Frt / Rr	kg	4 269/4 029
GVM	kg	31 000
V	kg	25 700
GCM	kg	45 000
D/T	kg	45 000
Axle – front GA/GAU	kg	8 000
Axle – front A/AU	kg	7 700
Axle – rear GA/GAU	kg	23 000
Axle – rear A/AU	kg	18 000
* Tools included in tare		Yes
PERFORMANCE		
Gradeability at V	%	67.1
Gradeability at D/T	%	38.3
Max. geared road speed	km/h	114.4
MAJOR DIMENSIONS		
Overall length	mm	9 975
Overall width	mm	2 500
Wheelbase	mm	5 885
CA – cab to rear axle	mm	5 095
ROH – Centre of rear axle to end of frame	mm	2 610
Turning radius (curb to curb)	mm	10 000
ENGINE		
Model		GH11E
Capacity	cm³	10 837
Layout		In line six cylinders
Type		Turbo Intercooled (Unit Injectors)
Power at r/min	kW	278 @ 1 900
Torque at r/min	Nm	1 734 @ 1 000-1 400
Emissions standard		EUR III
TRANSMISSION		
Model		Escot-ATO2612F
Shift		Automated manual
No. of gears forward		12
First gear ratio		11.729
Top gear ratio		0.785
Transmission PTO		Prepared for PTO fitment

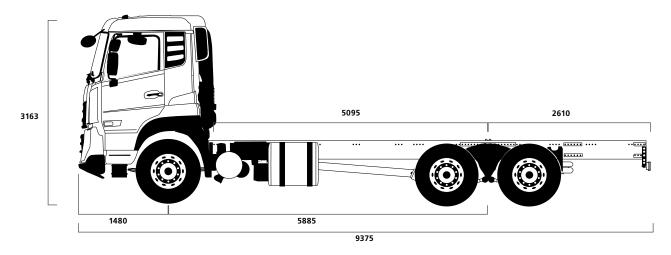

CLUTCH	
Model	Organic
Type	Single Plate
Diameter mm	430
Operation	Automated
DRIVE AXLE	
Model	RTS2670B
Reduction type	Tandem Single Reduction
Final ratio	4.63
SUSPENSION	
Front	Parabolic leaf spring
Rear	Multileaf Spring
Shock absorbers	Standard front
Stabilisers	Front Standard
STEERING	
Operation	Power Assisted
Steering Wheel Tilt & Telescopic	Standard
BRAKES	
System type	Full air
Front	S-cam Drum Brake
Rear	S-cam Drum Brake
Electronic brake system	ABS
Park/emergency system	Front and rear spring brakes
Exhaust brake	Standard
Engine brake	Standard
Retarder	Without retarter
ELECTRICAL AND FUEL	
Fuel tank 1 capacity ltrs	405 Steel tank
Fuel tank 2 capacity ltrs	Without
TYRES	
Size – front	315/80R22.5
Size – rear	315/80R22.5
CAB	
Type	Standard roof single sleeper (No cab back mattress)
Cab suspension	Mechanical suspension
No. of bunks	1
No. of seats	3 (Including Centre seat)
Seat Belts	Standard – ELR with Reminder (Lap Belt with Center Seat)
Seats	Fully adjustable air suspension with arm rest (Driver), Fixed passenger
Air conditioning	Standard
Radio/USB	Standard
On-board computer	Multi Display function
Tilt cab	Mechanical
Speed limiter km/h	80
Rear View Mirrors	6 total (Front and LHS close proximity, rear and wide angle RHS & LHS)
12 Volt Power Outlet	Standard in Dash
Rear lower storage underbunk	Without
Driver Fuel Coaching Tool	Standard
Telematics Communication Gateway	Gateway with GSM/GPRS/EDGE
	5 a to 11 a j 11 a l

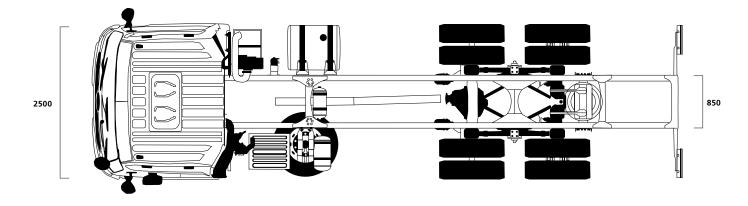

Specifications and options may differ depending on each country due to regulations or special requirements. Dimensions and devices may be changed without prior notice. Please contact your nearest UD Trucks dealer for further details.

